


# We BRIGHTEN Your BRANDS

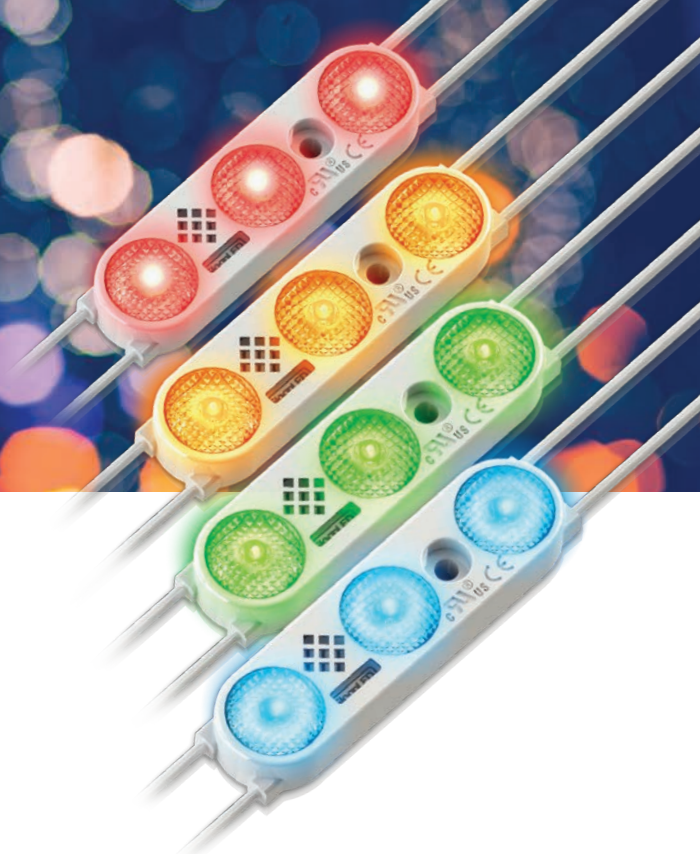

## SloanLED Prism Colors

### Reimagined LED lens technology

- Brightest lighting option in class
- Widest, most even spread of light
- Optimal for applications 75-200 mm in depth

## SPECIFICATIONS

**Dimensions L x W x H** ..... 70 mm x 19 mm x 13 mm

**LEDs per module** ..... 3

**Operating temperature** ..... -40° C to +70° C

**Protection class** ..... IP66 & IP68<sup>1</sup>

**Power per module** ..... 0.72 W


**Fastening** ..... Peel-n-stick and mechanical



<sup>1</sup> IP66 & IP68 ratings provide protection for extreme outdoor and wet applications or harsh weather exposure. Do not mount in a submerged application.

SloanLED channel letter products are covered by US and foreign patents pending and covered by one or more of the following US patents issued: 6,932,495, 7,160,140, 7,241,031, 7,520,771, 7,931,386 and European Patent No. 1756471.

**Luminous Intensity Distribution**

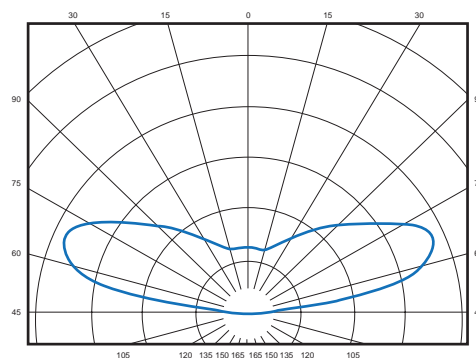

Part number	Color	Nominal wavelength	Modules per meter	Lumens per module (nominal)	Efficacy	Power capacity per SloanLED 60 W 12 VDC power supply	Packaging of 5 trays per carton
701269-RDSJ3-MB	Red	628	6.6/m	24	33.5 lm/W	75 modules (11.4 m)	7.3 m (48 modules) per tray
701269-RDSJ1-MB							
701269-ORSJ1-MB	Orange	606	4.9/m	60	83 lm/W	75 modules (15.2 m)	9.8 m (48 modules) per tray
701269-GRSJ1-MB	Green	527					
701269-BLSJ1-MB	Blue	471					
				18	25 lm/W		

SloanLED Headquarters  
5725 Olivas Park Drive • Ventura, California 93003  
805.676.3200 • info@SloanLED.com

SloanLED Europe b.v.  
Overslagweg 7 • 2645 EK Delfgauw • The Netherlands  
+31 88 12 44 900 • Europe@SloanLED.com

**SloanLED.com**

© 2016 SloanLED Rev A 2016-10-24

